

# Calibration Gas Regulators

## VSR-15 Series

### Product Features


- Cylinder pressure regulator
- Brass chrome plated body or stainless steel body
- Piston type

### Typical Applications


- Calibration system

### Technical Data


Type:	single-stage
Inlet pressure:	max. 200 bar
Outlet pressure:	4 bar(standard) 2 bar(option)
Outlet flow settings:	see ordering info
Materials	
Body regulator:	see ordering info
Temperature range:	-20°C to +50°C
Leak rate:	Bubble-tight
Weight:	0.35 kg

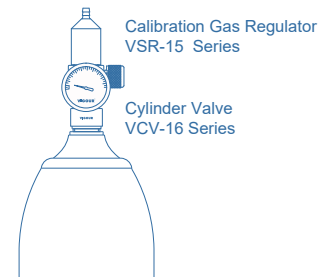


### Dimensions (mm)

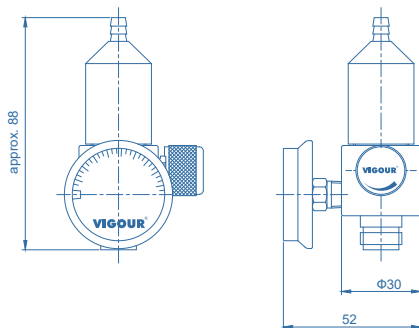

### Flow Chart

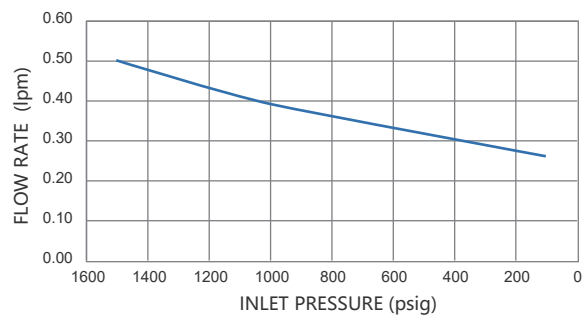

### Ordering Information

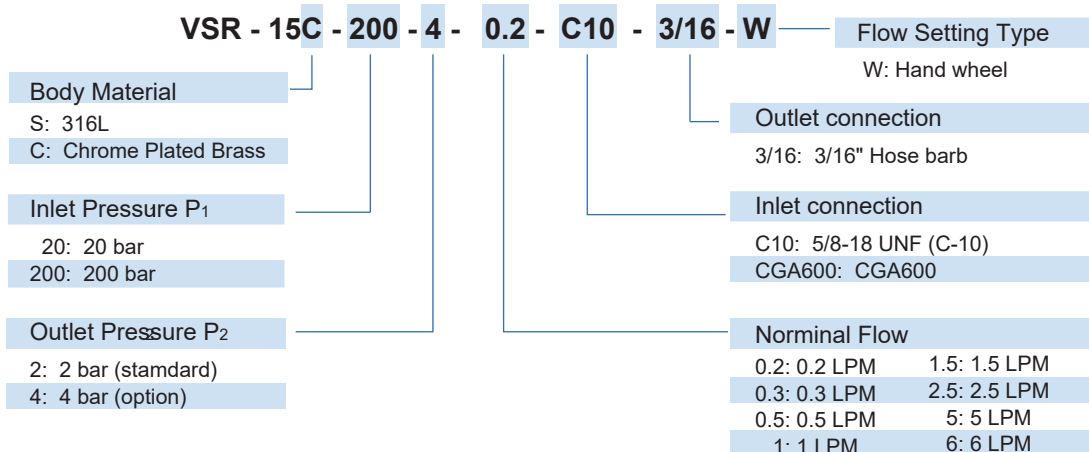

# Calibration Gas Regulators

## VSR-19 Series

### Product Features


- Cylinder pressure regulator
- Aluminum body
- Piston type
- On / Off valve

### Typical Applications


- Disposable cylinders of non-corrosive gases
- Calibration system

### Technical Data

Type:	single-stage
Inlet pressure:	max. 200 bar
Outlet flow settings (orifice):	see ordering info
Materials	
Body regulator:	aluminum
Inlet fitting:	C10, CGA600
Outlet fitting:	3/16" Hose barb
Temperature operating range:	-20°C to +50°C
Weight:	0.30 kg




### Dimensions (mm)



### Ordering Information

**VSR - 19A - 15 - C10 - 3/16**

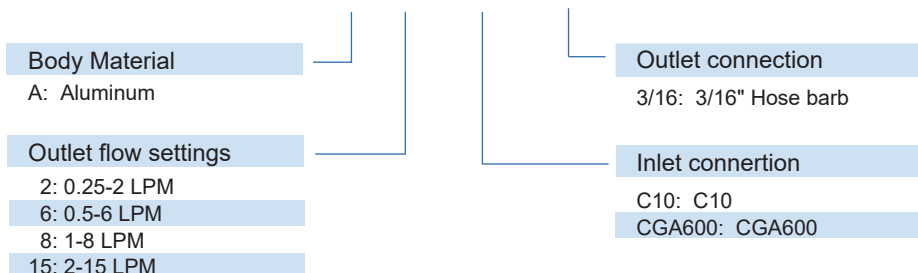

# Calibration Gas Disposable Aluminum Cylinder Valves

## VCV-16 Series

### Product Features


- Disposable Calibration Gas Cylinder Valve
- Brass chrome plated body or stainless steel body

### Typical Applications



- Designed for calibration applications.

### Technical Data

Inlet pressure:	max. 200 bar
Body material:	see ordering info
Inlet connection:	1"-14UNF/3/4"-16UNF
Outlet connection:	5/8"-18UNF
Leak rate:	Bubble-tight
Temperature range:	-20°C to +70°C
Weight:	0.10kg

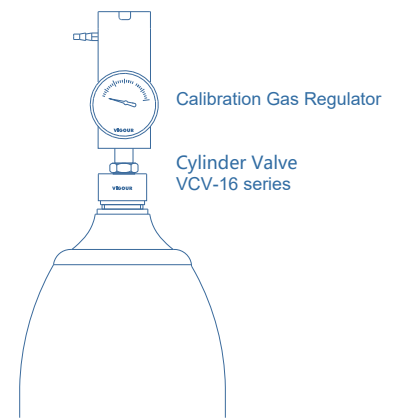

### Dimensions (mm)



### Ordering Information

**VCV - 16 S - 40 - A**

